

AVR Servo Type 1Phase Series

Feature

The series product is a servo-motor type high accuracy household voltage stabilizer. Low power consumption, reliable work, high accuracy of stabilization, and good for use in regions where the net voltage is much fluctuating.

Application

Computer, Testing equipment, Lighting system, Communication system, Medical equipment, Industrial automatic equipment, Stereo sound equipment and home appliance etc.

Specification

0.5KVA



Input voltage	140V-250V	Relative humidity	< 95%
Output voltage	220V/110V	Ambient temperature	-10°C~+40°C
Accuracy of voltage	±2.5%	Efficiency	> 90%
Frequency	50Hz/60Hz	Package size D×W×H(cm)	25×44×35
Response time	≤ 1.5S	Qty per pkg(unit)	4

1KVA/1.5KVA



Input voltage	140V-250V	Relative humidity	< 95%
Output voltage	220V/110V	Ambient temperature	-10°C~+40°C
Accuracy of voltage	±2.5%	Efficiency	> 90%
Frequency	50Hz/60Hz	Package size D×W×H(cm)	25×44×35
Response time	≤ 1.5S	Qty per pkg(unit)	4

2KVA



Input voltage	140V-250V	Relative humidity	< 95%
Output voltage	220V/110V	Ambient temperature	-10°C~+40°C
Accuracy of voltage	±2.5%	Efficiency	> 90%
Frequency	50Hz/60Hz	Package size D×W×H(cm)	54×29×21
Response time	≤ 1.5S	Qty per pkg(unit)	4

3KVA/5KVA



Input voltage	140V-250V	Relative humidity	< 95%
Output voltage	220V/110V	Ambient temperature	-10°C~+40°C
Accuracy of voltage	±2.5%	Efficiency	> 90%
Frequency	50Hz/60Hz	Package size D×W×H(cm)	60×34×22
Response time	≤ 1.5S	Qty per pkg(unit)	2

AVR Servo Type 1Phase Series

7.5KVA / 10KVA (Vertical Type)



Input voltage	160V-250V	Relative humidity	< 95%
Output voltage	220V	Ambient temperature	-10°C ~ +40°C
Accuracy of voltage	±2.5%	Efficiency	> 90%
Frequency	50Hz/60Hz	Package size D x W x H(cm)	36 x 31 x 70
Response time	≤ 1.5S	Qty per pkg(unit)	1

15KVA / 20KVA



Input voltage	160V-250V	Relative humidity	< 95%
Output voltage	220V	Ambient temperature	-10°C ~ +40°C
Accuracy of voltage	±2.5%	Efficiency	> 90%
Frequency	50Hz/60Hz	Package size D x W x H(cm)	40 x 38 x 74
Response time	≤ 1.5S	Qty per pkg(unit)	1

30KVA



Input voltage	160V-250V	Relative humidity	< 95%
Output voltage	220V	Ambient temperature	-10°C ~ +40°C
Accuracy of voltage	±2.5%	Efficiency	> 90%
Frequency	50Hz/60Hz	Package size D x W x H(cm)	44 x 40 x 82
Response time	≤ 1.5S	Qty per pkg(unit)	1

45KVA/60KVA



Input voltage	160V-250V	Relative humidity	< 95%
Output voltage	220V	Ambient temperature	-10°C ~ +40°C
Accuracy of voltage	±2.5%	Efficiency	> 90%
Frequency	50Hz/60Hz	Package size D x W x H(cm)	62 x 60 x 109
Response time	≤ 1.5S	Qty per pkg(unit)	1




◆ All specifications subject to change without notice. Custom-made specifications are acceptable.

Product Details



Output voltage ● ● Output current

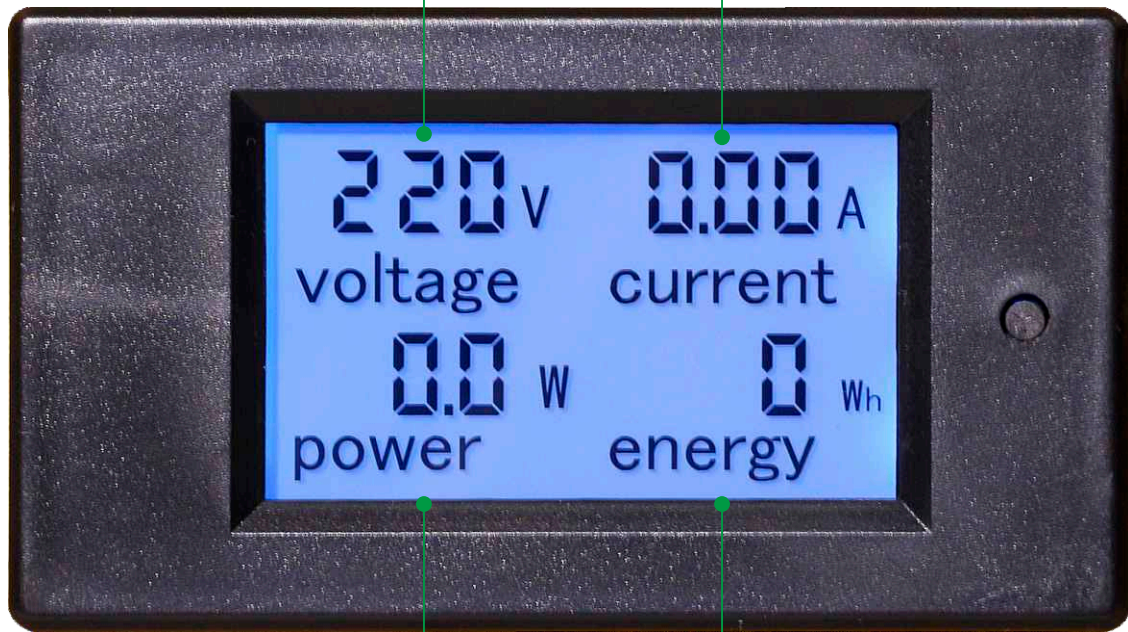

Power function ● ● Electricity consumption

LCD table main function

- 1, Large-screen LCD screen Function display (voltage, current, active power, electricity)
- 2, Overload alarm function (over power alarm threshold, backlight and power flashing prompt)
- 3, Power alarm Threshold preset function (Factory default setting, Do not adjust).
- 4, power button clear function
- 5, Power cut data storage function
- 6, Backlight night vision

AVR Servo Type 1Phase Series

NUMBER REVEALS CORE TECHNOLOGY
NEW ERA OF DIGITAL DISPLAY THE KING

220v voltage 0.00A current 0.0w power 0Wh energy

220V voltage 0.00A current
0.0W power 0Wh energy

Advantages:
high stability and reliability,
strong ability with load, quick response speed,
high precision, good working performance.

SPECIAL QUALITY
Large screen display, the reading of the clear,
extraordinary quality perfect.

HOW MUCH LOAD TO SEE CLEARLY
0.0w power
用电功率
Time to protect the safety of electrical equipment

AUTOMATIC READING OF METER TO SEE CLEARLY
69Wh energy
用电量
Meters, to monitor both use, would give consumers more control over their electricity bill.

See 2006

AC AUTOMATIC VOLTAGE REGULATOR

AC 151 V
INPUT VOLTAGE

AC 220 V
OUTPUT VOLTAGE

NORMAL WORK **EXCESS VOLTAGE** **LACK VOLTAGE**

STABILIZER **CITYPOWER**

AVR-10KVA

YUEQING NQQK ELECTRIC FACTORY

Professional Power Source Manufacturer

ADD: XINGUANG INDUSTRY ZONE, LIUSHI TOWN, YUEQING CITY,
ZHEJIANG PROVINCE, 325604 CHINA

Create a better future, Compose a more brilliance together

Tel: 0086-577-62769189

Fax:0086-577-62769289

M.T.:0086-13968785810

Whatsapp:0086-13968785810

Http://www.nqqkelc.com

E-mail: sales@nqqkelc.com

P. C. : 325604

◆ All specifications subject to change without notice. ◆ Custom-made specifications are acceptable.